

United



SHFM Series Test Systems

SERVO-CONTROLLED HYDRAULIC FLOOR MODEL

Universal testing machines for today's high capacity applications require sturdy load frames along with computer data acquisition and control capabilities. The fully-accessorized UNITED SHFM Series Testers include a complement of support hardware and accessories to immediately commence testing for tensile or compressive strength as well as bend and flex testing. Load cells are standard equipment for SHFM Series machines. United SHFM Series Test Systems are available in capacities from 300kN to 2,000 kN (67,500 Lbf to 450,000 Lbf).

By incorporating proven hardware plus USB-connectivity for high speed data acquisition and control, the SHFM Series takes full advantage of our extensive library of Windows®-based test methods. These test methods generate test results that are fully compliant with internationally recognized standards such as ASTM, ISO, EN, JIS, DIN and BS.


SHFM Series Load Frame Specifications

	SHFM-300KN	SHFM-600KN	SHFM-1000KN	SHFM-2000KN
Capacity (kN)	300	600	1,000	2,000
Capacity (Lbf)	67,500	135,000	225,000	450,000
Load Accuracy (2% to 100% Capacity)	+/- 0.5%	+/- 0.5%	+/- 0.5%	+/- 0.5%
Load Measurement	Load Cell	Load Cell	Load Cell	Load Cell
Encoder Resolution	0.0005 mm (0.00002in)	0.0005 mm (0.00002in)	0.0005 mm (0.00002in)	0.0005 mm (0.00002in)
Maximum Ram Stroke (mm)	250	250	250	250
Adjustable Test Space Height				
Adjustment Speed (mm/min)	300	300	200	100
Maximum Test Space (mm)	700	700	700	1,100
Max Compression Space (mm)	630	630	680	850
Width of Test Space Between Cols	440	480	570	750
Maximum Ram Speed (mm/min)	100	100	100	100
Max Ram Speed w/ High Speed Ram Option - available at additional cost (mm/min) :	200	200	200	N/A
Grip Type	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Flat Inserts Sample Thickness (mm)	0 - 25	0 - 30	0 - 40	0 - 60
V-Inserts Sample Diameter (mm)	13 - 36	13 - 40	20 - 60	30 - 80
Insert Dimensions (mm)	90 H x 90 W	90 H x 90 W	110 H x 110 W	160 H x 160 W
Compression Plate Diameter (mm)	120	120	150	200
Bend/Flex Fixture Span (mm)	350	600	600	800
Bend/Flex Support & Nose Width (mm)	140	140	140	140
Max Bend Displacement (mm)	100	100	100	100
Load Frame Dimension (L x W x H) (mm)	750 x 580 x 2,100	770 x 600 x 2,150	900 x 670 x 2,350	1,300 x 900 x 3,530
Weight in Kg (Lb)				
Load Frame	1,400 (3,100)	1,600 (3,500)	2,700 (5,900)	8,800 (19,400)
Hydraulic Control Unit	265 (580)	265 (580)	265 (580)	265 (580)
Computer and Monitor	16 (36)	16 (36)	16 (36)	16 (36)

Specifications subject to change without notice.

Standard Accessories

- Intel Pentium IV PC
- Hydraulic Grips
- Flat Inserts
- "V"-type Inserts
- Bend/Flex Fixture
- Compression Plates

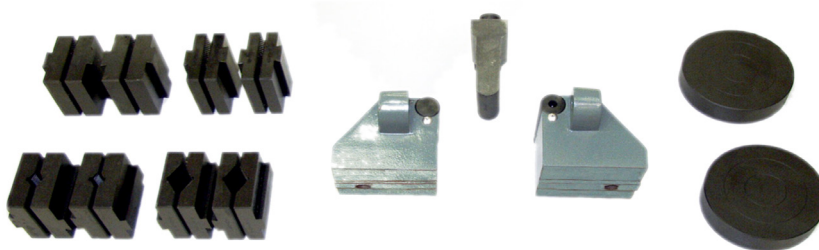

07/2011

United

Web: www.tensiletest.com

E-mail: united@tensiletest.com

United Calibration Corp.
 5802 Engineer Drive
 Huntington Beach, CA 92649
 Phone: (714) 638-2322, (800) 765-9997
 Fax: (714) 897-8496

United Testing Systems, Inc.
 5171 Exchange Drive
 Flint, MI 48507
 Phone: (810) 732 - 2800, Fax: (810) 732-2872
 Email: Utsflint@sbcglobal.net

United Testing Systems Canada, Ltd.
 225 Bradwick Drive, Unit 21
 Concord (Toronto), Ontario L4K 1K7
 Phone: (905) 669-5327, Fax: (905) 738-5051
 Email: sales@utscanada.com